



Curb & Sidewalk Borders



Flower Beds or Planters



Garden Borders or Tree Rings

Use this guide for estimating the number of Keystone Sedona Stone™ units required.

WALL HEIGHT	WALL LENGTH (measured at wall face including curves)					
	5'	10'	15'	20'	25'	30'
3" (1 course)	8	15	23	30	38	45
6" (2 courses)	16	30	46	60	76	90
9" (3 courses)	24	45	69	90	114	135
12" (4 courses)	32	60	92	120	152	180

Please Note:
Maximum wall height not to exceed 12". This chart is based on site conditions which include a level grade, granular soil and no surcharge. Contact Keystone Retaining Wall Systems for design options and patented soil reinforcement guidelines on wall heights exceeding 12".

Distributed By:



Retaining Excellence

A Contech Company
4444 West 78th Street
Minneapolis, MN 55435
(952) 897-1040
www.keystonewalls.com

We reserve the right to improve our products and make changes in the specifications and design without notice. The information contained herein has been compiled by KEYSTONE and to the best of our knowledge, accurately represents the KEYSTONE product use in the applications which are illustrated. Final determination of the suitability for the use contemplated and its manner of use are the sole responsibility of the user.

©2004 Keystone Retaining Wall Systems, Inc.
Patent Pending.

KS-0419

KEYSTONE

Sedona Stone™



Build it Yourself



Keystone Sedona Stone™

Add beauty to any home or garden landscape in 3 easy steps.

A Beautiful Addition to Your Home Exterior

Keystone Sedona Stone™ has the natural look of quarried stone and its earthy colors blend with any landscape.

A Do-it-Yourselfer's Dream

Keystone Sedona Stone™ is lightweight and easy to handle. No special tools are required. Its secure, interlocking design makes installation as easy as 1-2-3.

A Solid & Durable Solution

Keystone Sedona Stone™ is made of high-strength, low-absorption concrete to provide permanent, environmentally safe walls that are virtually maintenance free.

A Versatile Landscape Tool

Keystone Sedona Stone™ enables you to build straight, curved, or terraced walls to fit the contours of your yard.



- Unit dimensions: 3"H x 8"W x 5.25"D.
- Each Keystone Sedona Stone™ unit weighs only 8 lbs making it fast and easy to install by yourself.
- Unit dimensions, weight and color may vary slightly by region.

*Size, unit weight, color and availability may vary by region.

Step 1

Prepare the site.

Start by digging a shallow trench 4" deep by 12" wide. Cut through and remove any sod, roots or large rocks. For organic loam soils, dig 4" deeper and add a leveling pad of sand or gravel. Compact and level the soil to receive the first course of Keystone Sedona Stone™.



Step 2

Set the base course.

Place and level the first Keystone Sedona Stone™ unit. Level each additional unit on the base course as you place it, making sure that the outside edges touch. If your wall contains both straight and curved areas, start with a straight area and build into the curves. Complete the base course before proceeding to the second course.



Step 3

Stack and fill.

Starting with straight areas first, begin placing the second course. Center each Keystone Sedona Stone™ unit on the seams of the course below in a running bond pattern as shown. Now proceed to the next layer, backfilling as you go. For drainage behind the wall, clean gravel or crushed stone is recommended.




Remove Edges.

To remove outside lugs or edges of retaining lip, hold unit securely or place at angle on ground. Strike the lug firmly with a hammer. Always wear safety glasses to protect eyes from chips.



Building Curves.

Curves as small as 1'-6" in radius can be built with Keystone Sedona Stone™.

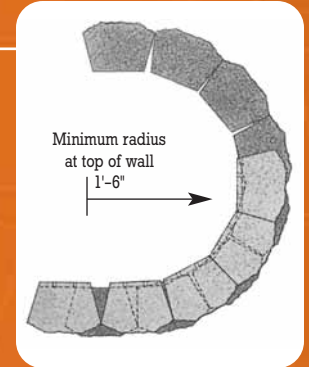

Typical Keystone Sedona Stone™ Section.

Use clean granular backfill such as gravel or crushed stone for drainage and to prevent soil from leaching through the wall. A commercial filter fabric (stocked by most garden supply stores) may be used when more organic or silty site soils are used for backfill.

