



Keystone Verazzo Stone™

- Exceptional design versatility
- Handsome and rugged appeal
- Easy to install
- Angled and textured on two sides
- Perfect for 2-sided applications
- Blends with any landscape

KEYSTONE
Verazzo Stone™



Distributed By:



Keystone Retaining Wall Systems, Inc.
A CONTECH Company
4444 West 78th Street • Minneapolis, MN 55435
(952) 897-1040 • www.keystonewalls.com


We reserve the right to improve our products and make changes in the specifications and design without notice. The information contained herein has been compiled by KEYSTONE and to the best of our knowledge, accurately represents the KEYSTONE product use in the applications which are illustrated. Final determination of the suitability for the use contemplated and its manner of use are the sole responsibility of the user.



Build It Yourself

KEYSTONE
Verazzo Stone™

*Unmatched Strength, Stability
& Rugged Appeal*

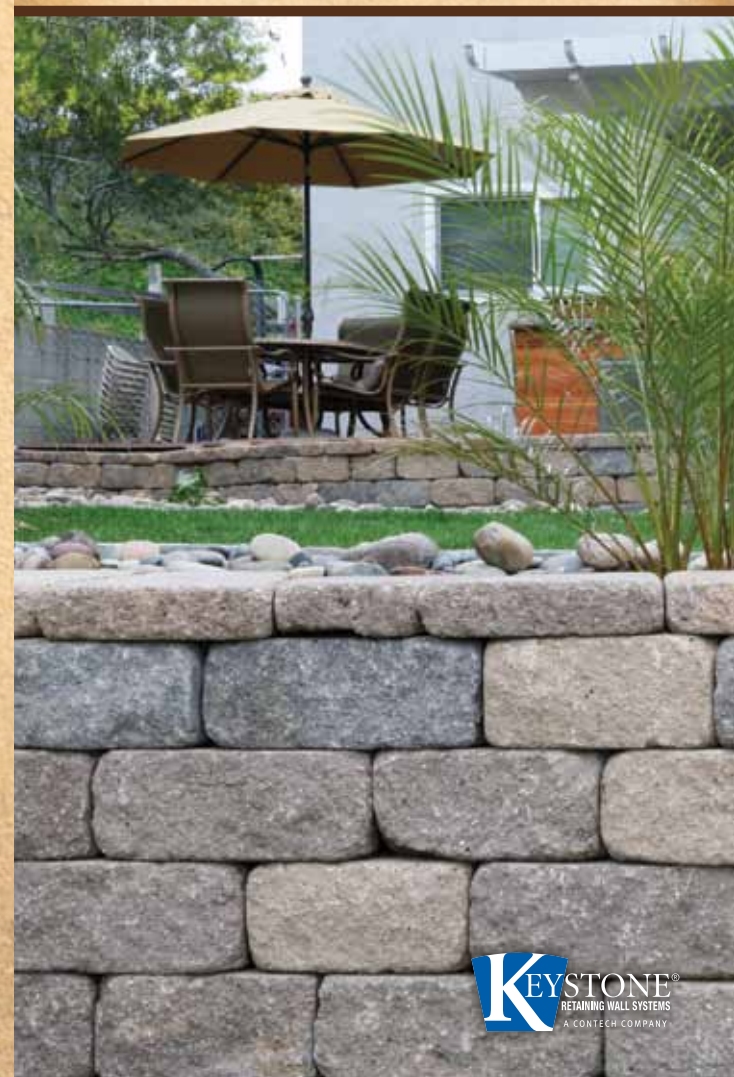



Handsome and rugged good looks combine with unparalleled strength and stability.

UNMATCHED NATURAL BEAUTY

- Finished on two sides, allowing both 1- and 2-sided project designs.
- Features a natural stone look without the natural stone price.
- Enhances any outdoor décor with natural colors and textures.

UNPARALLELED SIMPLICITY

- Easy to install, single-unit system.
- Random-pattern aesthetics without a mixed pallet or multiple pieces.
- Keystone's proven pin connection system makes aligning units effortless.

EXCEPTIONALLY VERSATILE AND FLEXIBLE

- Angled on both sides, providing different face lengths for tight fitting straight-line walls and radii at curves.
- Can be used in multiple positions within the wall, and can also be used for 2-sided applications.
- Multiple pin positions allow for near vertical, positive and negative setbacks.



- 6" H x 16/12" W x 10½" D
- Approximately 68 lbs each
- Finished on two sides

- 2 alignment pins required per unit
- 2 ¾" (60 mm) total length
- 1" (26 mm) shoulder length



Installation

Step 1

PREPARE THE SITE.



Start by digging a shallow trench 12" deep by 24" wide. Cut through and remove any sod, roots or large rocks. Place 6" leveling pad of compacted sand or gravel in the trench to receive the first course of Keystone Verazzo Stone.

Step 2

SET THE BASE COURSE.



Place and level the first Keystone Verazzo Stone unit. Level each additional unit on the base course as you place it, making sure that the outside edges touch. If your wall contains both straight and curved areas, start with a straight area and build into the curves. Complete the base course before proceeding to the second course.

**Note: For straight line walls, unit faces can be alternated to create a more random look.*

Step 3

PIN, STACK, AND FILL.



Starting with straight areas first, begin placing the second course. Center each Keystone Verazzo Stone unit over the pins on the joints of the course below in a running bond pattern as shown. Now proceed to the next layer, backfilling as you go. For drainage between units and behind the wall, clean gravel or crushed stone is recommended.

Estimating

Use this guide for estimating the number of Keystone Verazzo Stone units required.

WALL HEIGHT*	WALL LENGTH (measured at wall face including curves)					
	4'	8'	12'	16'	20'	24'
6" (1 course)	4	8	12	16	20	24
12" (2 courses)	8	16	24	32	40	48
18" (3 courses)	12	24	36	48	60	72
24" (4 courses)	16	32	48	64	80	96
30" (5 courses)	20	40	60	80	100	120
36" (6 courses)	24	48	72	96	120	144

Maximum Height Vertical Position Maximum Height Setback Position

*Notes:

- Maximum wall height not to exceed 36". The maximum height is based on a level grade, total granular soil, wall built in setback position, and no surcharge. Contact your local Keystone representative for design options on wall heights exceeding 36" or supporting surcharges and backslope.
- Change in color on chart denotes maximum wall height for vertical and setback positions.
- Keystone recommends cap units as the top course and/or caps of freestanding walls secured with Keystone KapSeal™ adhesive.

